

L2N7002SDW1T1G

S-L2N7002SDW1T1G

Small Signal MOSFET



380 mAmps, 60 Volts N-Channel SC-88

1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- ESD protected
- Low RDS(on)

2. APPLICATIONS

- Low side load switch
- Level shift circuits
- DC-DC converter
- Portable applications i.e. DSC, PDA, Cell Phone, etc.



3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
L2N7002SDW1T1G	701	3000/Tape&Reel
L2N7002SDW1T3G	701	10000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	VDSS	60	Vdc
Gate-Source Voltage	VGS	±20	Vdc
Drain Current	ID		mAdc
- Steady State TA = 25°C		320	
TA = 85°C		230	
- t<5s TA = 25°C		380	
TA = 85°C		270	
Pulsed Drain Current (tp=10µs)	IDM	1.5	A
Source Current (Body Diode)	IS	300	mA

5. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Total Device Dissipation(Note 1)	PD		mW
– Steady State		300	
– t<5s		420	
Junction-to-Ambient(Note 1)	R θ JA		°C/W
– Steady State		417	
– t<5s		300	
Lead Temperature for Soldering Purposes (1/8 " from case for 10 s)	TL	260	°C
Junction and Storage temperature	TJ, Tstg	-55~+150	°C
Gate-Source ESD Rating(HBM, Method 3015)	ESD	2000	V

6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

OFF CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage (VGS = 0, ID = 250 μ Adc)	VBRDSS	60	-	-	Vdc
Drain-to-Source Breakdown Voltage Temperature Coefficient	VBRDSS/TJ	-	71	-	mV/°C
Zero Gate Voltage Drain Current (VGS = 0, VDS = 60 Vdc)	IDSS	TJ = 25°C	-	1.0	μ Adc
		TJ = 125°C	-	500	
(VGS = 0, VDS = 50 Vdc)		TJ = 25°C	-	100	nAdc
Gate-Body Leakage Current, Forward (VGS = 20 Vdc)	IGSSF	-	-	10	μ Adc
Gate-Body Leakage Current, Reverse (VGS = - 20 Vdc)	IGSSR	-	-	-10	μ Adc

ON CHARACTERISTICS (Note 2)

Gate Threshold Voltage (VDS = VGS, ID = 250 μ Adc)	VGS(th)	1.0	-	2.0	Vdc
Negative Threshold Temperature Coefficient	VGS(TH)/TJ	-	4	-	mV/°C
Static Drain-Source On-State Resistance (VGS = 10 Vdc, ID = 500 mAdc)	RDS(on)	-	-	2.8	Ω
(VGS = 4.5 Vdc, ID = 200 mAdc)		-	-	3.2	
Forward Transconductance (VDS = 5.0 Vdc, ID = 200 mAdc)	gfs	80	-	-	mS

DYNAMIC CHARACTERISTICS

Input Capacitance (VDS = 25 Vdc, VGS = 0, f = 1.0 MHz)	Ciss	-	21	42	pF
Output Capacitance (VDS = 25 Vdc, VGS = 0, f = 1.0 MHz)	Coss	-	12	24	pF
Reverse Transfer Capacitance (VDS = 25 Vdc, VGS = 0, f = 1.0 MHz)	Crss	-	0.35	0.7	pF
Total Gate Charge	VGS = 4.5 V, VDS = 10 V; ID= 500 mA	QG(TOT)	-	0.44	nC
Gate-to-Source Charge		QGS	-	0.2	
Gate-to-Drain Charge		QGD	-	0.1	

1. FR-4 = 1.0×0.75×0.062 in.

 2. Pulse Test: Pulse Width \leq 300 μ s, Duty Cycle \leq 2.0%.

6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)(Con.)





SWITCHING CHARACTERISTICS

Turn-On Delay Time	VDS = 30 V, VGEN = 10 V, ID = 500 mA, RG = 25Ω ,RL =60Ω	td(on)	-	2.7	-	ns
Rise Time		tr	-	2.5	-	
Turn-Off Delay Time		td(off)	-	13	-	
Fall Time		tf	-	8	-	





BODY-DRAIN DIODE RATINGS

Diode Forward On-Voltage (IS = 0.5A, VGS = 0 V)	VSD	-	0.85	-	Vdc
--	-----	---	------	---	-----

7. ELECTRICAL CHARACTERISTICS CURVES

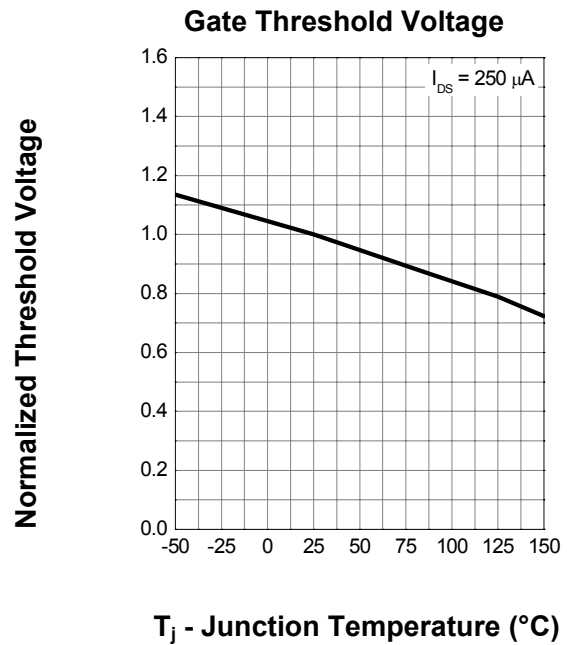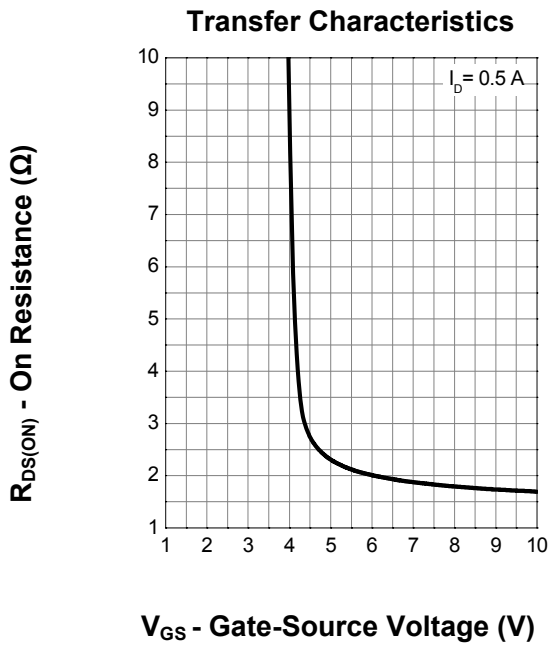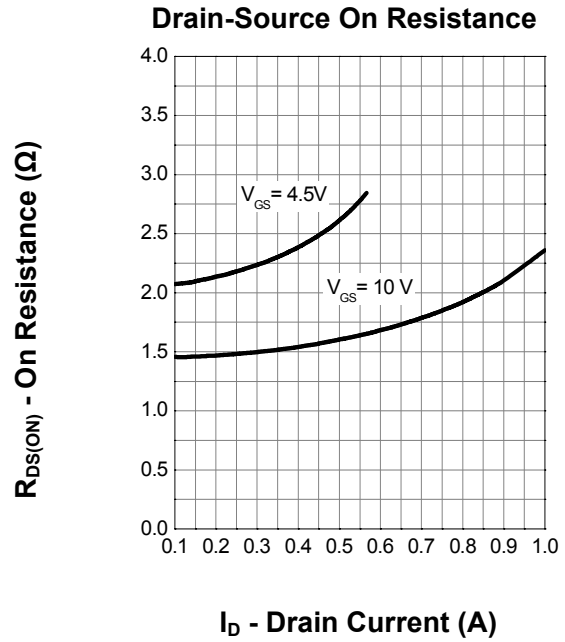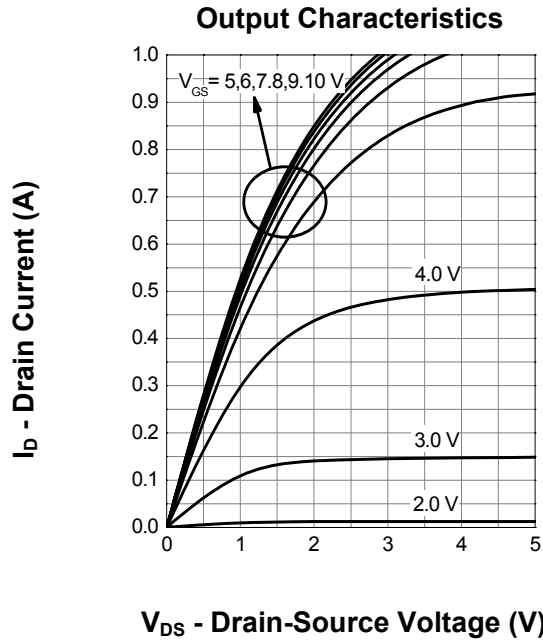

7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

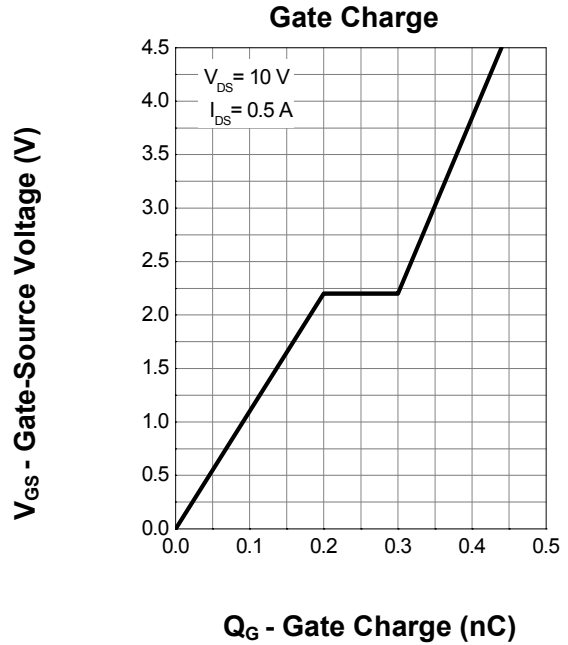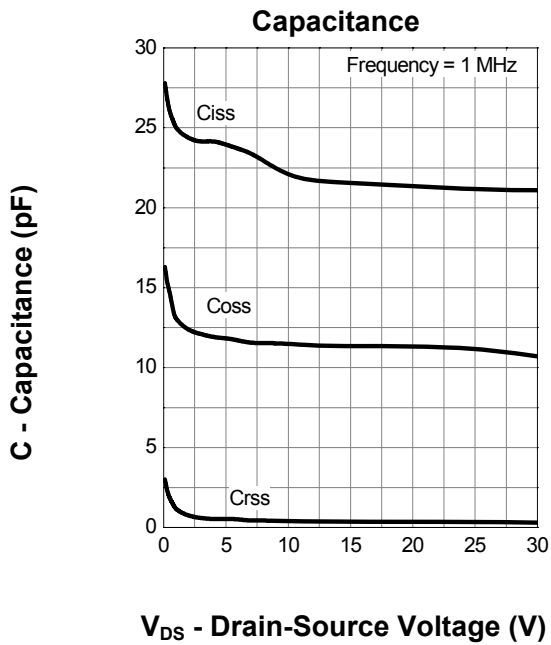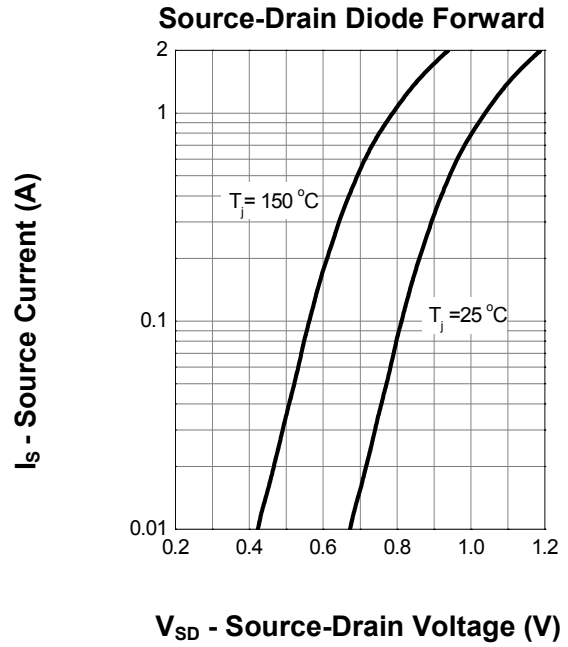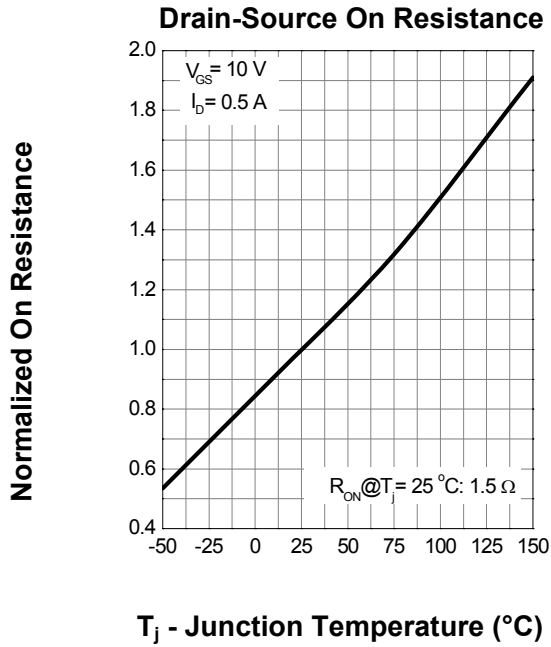

7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

