

## Is Now Part of



## ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



April 2000 Revised January 2005

## NC7WZ32

## TinyLogic® UHS Dual 2-Input OR Gate

## **General Description**

The NC7WZ32 is a dual 2-Input OR Gate from Fairchild's Ultra High Speed Series of TinyLogic®. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad V<sub>CC</sub> operating range. The device is specified to operate over the 1.65V to 5.5V V<sub>CC</sub> range. The inputs and output are high impedance when  $V_{\mbox{\footnotesize{CC}}}$  is 0V. Inputs tolerate voltages up to 7V independent of V<sub>CC</sub> operating voltage.

## **Features**


- Space saving US8 surface mount package
- MicroPak™ Pb-Free leadless package
- Ultra high speed t<sub>PD</sub> 2.4 ns Typ into 50 pF at 5V V<sub>CC</sub>
- High output drive ±24 mA at 3V V<sub>CC</sub>
- Broad V<sub>CC</sub> operating range 1.65V to 5.5V
- Matches the performance of LCX when operated at  $3.3V V_{CC}$
- Power down high impedance inputs/output
- Overvoltage tolerant inputs facilitate 5V to 3V translation
- Proprietary noise/EMI reduction circuitry implemented

## **Ordering Code:**

Order Number	Package Number	Product Code Top Mark		Supplied As
NC7WZ32K8X	MAB08A	WZ32	8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide	3k Units on Tape and Reel
NC7WZ32L8X	MAC08A	N5	Pb-Free 8-Lead MicroPak, 1.6 mm Wide	5k Units on Tape and Reel

Pb-Free package per JEDEC J-STD-020B.

## **Logic Symbol**



## **Pin Descriptions**

Pin Names	Description
A <sub>n</sub> , B <sub>n</sub>	Inputs
Y <sub>n</sub>	Output

### **Function Table**


Y = A + B

Inp	Output	
Α	В	Υ
L	L	L
L	Н	Н
Н	L	Н
Н	Н	Н

H = HIGH Logic Level L = LOW Logic Level

TinyLogic® is a registered trademark of Fairchild Semiconductor Corporation. MIcroPak™ is a trademark of Fairchild Semiconductor Corporation.

## **Connection Diagrams**



## Pin One Orientation Diagram



AAA represents Product Code Top Mark - see ordering code

Note: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

#### Pad Assignments for MicroPak



(Top Thru View)

## **Absolute Maximum Ratings**(Note 1)

 $@V_{IN} < -0.5V$  -50 mA

DC Output Diode Current (IOK)

Junction Lead Temperature (T<sub>L</sub>);

Soldering, 10 seconds 260°C Power Dissipation (PD) @ +85°C 250 mW

# Recommended Operating Conditions (Note 2)

Input Rise and Fall Time (t<sub>r</sub>, t<sub>f</sub>)

 $V_{CC} = 1.80V \pm 0.15V, 2.5V \pm 0.2V \qquad 0 \text{ ns/V to } 20 \text{ ns/V} \\ V_{CC} = 3.3V \pm 0.3V \qquad 0 \text{ ns/V to } 10 \text{ ns/V} \\ V_{CC} = 5.0V \pm 0.5V \qquad 0 \text{ ns/V to } 5 \text{ ns/V} \\ \text{Thermal Resistance } (\theta_{JA}) \qquad 250^{\circ}\text{C/W}$ 

**Note 1:** Absolute Maximum Ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside datasheet specifications.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

## **DC Electrical Characteristics**


Symbol	Parameter	V <sub>CC</sub>		T <sub>A</sub> = +25°C		T <sub>A</sub> = -40°	C to +85°C	Units	Conditions	
Symbol	Farameter	(V)	Min	Тур	Max	Min	Max	Units		
V <sub>IH</sub>	HIGH Level Input Voltage	1.65 to 1.95	0.75 V <sub>CC</sub>			0.75 V <sub>CC</sub>		V		
		2.3 to 5.5	0.7 V <sub>CC</sub>			0.7 V <sub>CC</sub>		V		
V <sub>IL</sub>	LOW Level Input Voltage	1.65 to 1.95			0.25 V <sub>CC</sub>		0.25 V <sub>CC</sub>	V		
		2.3 to 5.5			$0.3~\mathrm{V}_{\mathrm{CC}}$		$0.3\mathrm{V_{CC}}$	٧		
V <sub>OH</sub>	HIGH Level Output Voltage	1.65	1.55	1.65		1.55				
		2.3	2.2	2.3		2.2		V	V – V	I 100 !! A
		3.0	2.9	3.0		2.9		٧	$V_{IN} = V_{IH}$ $I_{OH} = -100 \mu A$	10Η = -100 μΑ
		4.5	4.4	4.5		4.4				
		1.65	1.29	1.52		1.29				$I_{OH} = -4 \text{ mA}$
		2.3	1.9	2.15		1.9				$I_{OH} = -8 \text{ mA}$
		3.0	2.4	2.80		2.4		V		$I_{OH} = -16 \text{ mA}$
		3.0	2.3	2.68		2.3				$I_{OH} = -24 \text{ mA}$
		4.5	3.8	4.20		3.8				$I_{OH} = -32 \text{ mA}$
V <sub>OL</sub>	LOW Level Output Voltage	1.65		0.0	0.1		0.1			
		2.3		0.0	0.1		0.1	V	$V_{IN} = V_{IL}$ $I_{OL} = 100 \mu A$	1004
		3.0		0.0	0.1		0.1	v		ΙΟΣ = 100 μΑ
		4.5		0.0	0.1		0.1			
		1.65		0.08	0.24		0.24			I <sub>OL</sub> = 4 mA
		2.3		0.10	0.3		0.3			$I_{OL} = 8 \text{ mA}$
		3.0		0.15	0.4		0.4	V		$I_{OL} = 16 \text{ mA}$
		3.0		0.22	0.55		0.55			$I_{OL} = 24 \text{ mA}$
		4.5		0.22	0.55		0.55			$I_{OL} = 32 \text{ mA}$
I <sub>IN</sub>	Input Leakage Current	0 to 5.5			±0.1		±1	μΑ	$V_{IN} = 5.5V$	, GND
l <sub>OFF</sub>	Power Off Leakage Current	0.0			1		10	μΑ	V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V	
I <sub>CC</sub>	Quiescent Supply Current	1.65 to 5.5			1		10	μΑ	$V_{IN} = 5.5V$	, GND

## **AC Electrical Characteristics**

Symbol	Parameter	$V_{CC}$ $T_A = +25^{\circ}C$		$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions	Figure		
		(V)	Min	Тур	Max	Min	Max	Oillio		Number
t <sub>PLH</sub> ,	Propagation Delay	1.8 ± 0.15	2.0	5.8	10.5	2.0	11.0			
t <sub>PHL</sub>		$2.5 \pm 0.2$	1.0	3.5	5.8	1.0	6.2	ns	$C_L = 15 pF$ ,	Figures 1, 3
		$3.3 \pm 0.3$	0.8	2.6	3.9	0.8	4.3	115	$R_L = 1M\Omega$	
		$5.0 \pm 0.5$	0.5	1.8	3.1	0.5	3.3			
t <sub>PLH</sub> ,	Propagation Delay	$3.3 \pm 0.3$	1.2	3.2	4.8	1.2	5.2	ns	$C_L = 50 \text{ pF},$	Figures
t <sub>PHL</sub>		$5.0 \pm 0.5$	0.8	2.4	3.7	0.8	4.0	115	$R_L = 500\Omega$	1, 3
C <sub>IN</sub>	Input Capacitance	0		2.5				pF		
C <sub>PD</sub>	Power Dissipation	3.3		14				pF	(Note 3)	Figure 2
	Capacitance	5.0		18				рі	(Note 3)	i iguie z

Note 3:  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption ( $I_{CCD}$ ) at no output loading and operating at 50% duty cycle. (See Figure 2.)  $C_{PD}$  is related to  $I_{CCD}$  dynamic operating current by the expression:  $I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC} static)$ .

## **AC Loading and Waveforms**



 $\mathbf{C}_{\mathbf{L}}$  includes load and stray capacitance.

Input PRR = 1.0 MHz,  $t_w = 500$  ns.


FIGURE 1. AC Test Circuit



Input = AC Waveforms;  $t_f = t_f = 1.8 \text{ ns}$ ;

PRR = 10 MHz; Duty Cycle = 50%


FIGURE 2. I<sub>CCD</sub> Test Circuit



# Tape and Reel Specification TAPE FORMAT for US8

THE ET CHAIN IT TO COO									
Package	Tape	Number	Cavity	Cover Tape Status					
Designator	Section	Cavities	Status						
	Leader (Start End)	125 (typ)	Empty	Sealed					
K8X	Carrier	3000	Filled	Sealed					
	Trailer (Hub End)	75 (typ)	Empty	Sealed					


## TAPE DIMENSIONS inches (millimeters)

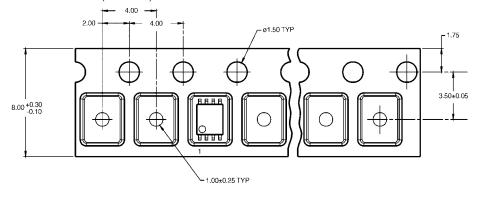

### TAPE FORMAT for MicroPak


Package	Tape	Number	Cavity	Cover Tape Status	
Designator	Section	Cavities	Status		
L8X	Leader (Start End)	125 (typ)	Empty	Sealed	
	Carrier	3000	Filled	Sealed	
	Trailer (Hub End)	75 (typ)	Empty	Sealed	

## TAPE DIMENSIONS inches (millimeters)

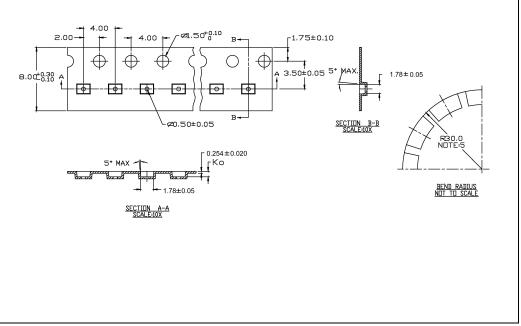


## Tape and Reel Specification (Continued)


REEL DIMENSIONS inches (millimeters)

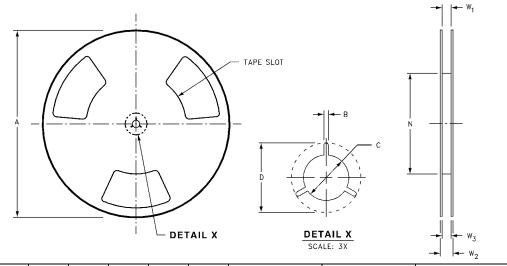


Tape Size	Α	В	С	D	N	W1	W2	W3
8 mm	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
0 111111	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)


## Physical Dimensions inches (millimeters) unless otherwise noted






### LAND PATTERN RECOMMENDATION







## NOTES:


- A. CONFORMS TO JEDEC REGISTRATION MO-187 B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

## DETAIL A

## MAB08AREVC

8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide Package Number MAB08A

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

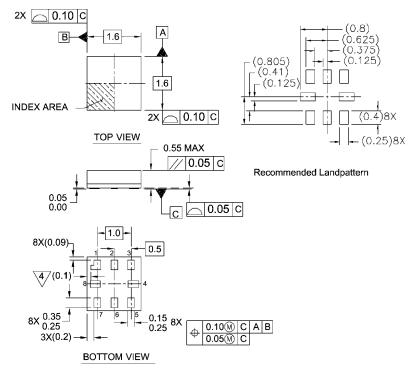

### Notes:

- 1. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y.14M-1994
- 4/PIN 1 FLAG, END OF PACKAGE OFFSET.

MAC08AREVC

Pb-Free 8-Lead MicroPak, 1.6 mm Wide Package Number MAC08A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

## **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative